

1-2-1970

Statitrol Ionization Duct Detectors Model 500/50I

Statitrol Corporation

Follow this and additional works at: <https://digitalcommons.wpi.edu/ms055-02-0006>



Part of the [Entrepreneurial and Small Business Operations Commons](#)

Recommended Citation


, (1970). Statitrol Ionization Duct Detectors Model 500/50I. .

Retrieved from: <https://digitalcommons.wpi.edu/ms055-02-0006/8>

This Other is brought to you for free and open access by the MS055-02 Statitrol Records at Digital WPI. It has been accepted for inclusion in MS055-02-0006 Statitrol Products by an authorized administrator of Digital WPI. For more information, please contact digitalwpi@wpi.edu.

1969 +/ -

from **STATITROL**[®] ionization duct detectors

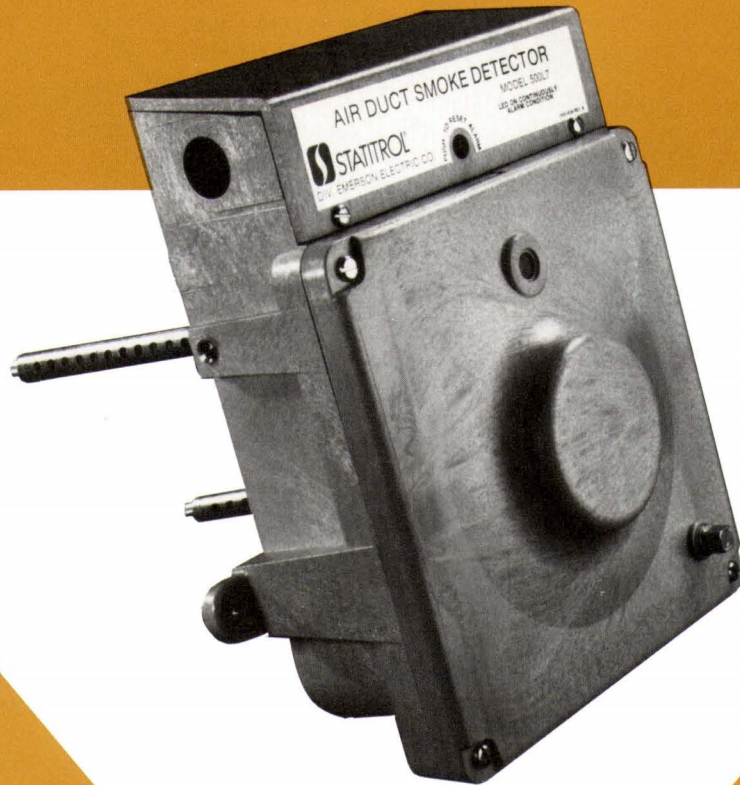

features

- Statitrol Quality

- Up to 10 amps-contact rating

- Visual L.E.D. alarm indication

- Two sets SPDT contacts — all models

- Test and reset without opening housing

- Self-sealing cover — no gasket required

- Pulsed L.E.D. gives visual sensitivity indication on 501 models

- Field Adjustable Sensitivity Control

- Sampling and reference tube kits accommodate duct widths from 6 inches to 12 feet

MODEL 500/501

- Built-in sensor

- 120 VAC or 24 VDC operation

- Remote alarm indicator output

- Trouble contacts on all 501 models

- Single station or system application

- Easy installation — installs without opening housing

- Lexan housing — metallic gray — never rusts — never paint — never chips — light weight



1978